LEGEND:
—··—··— Existing Structure
MEA - Mechanical Expansion Anchor

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER — X DATE

PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER — No. X — Exp. X — CIVIL — STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

THE REGISTERED CIVIL ENGINEER FOR THE PROJECT IS RESPONSIBLE FOR THE SELECTION AND PROPER APPLICATION OF THE COMPONENT DESIGN AND ANY MODIFICATIONS SHOWN.

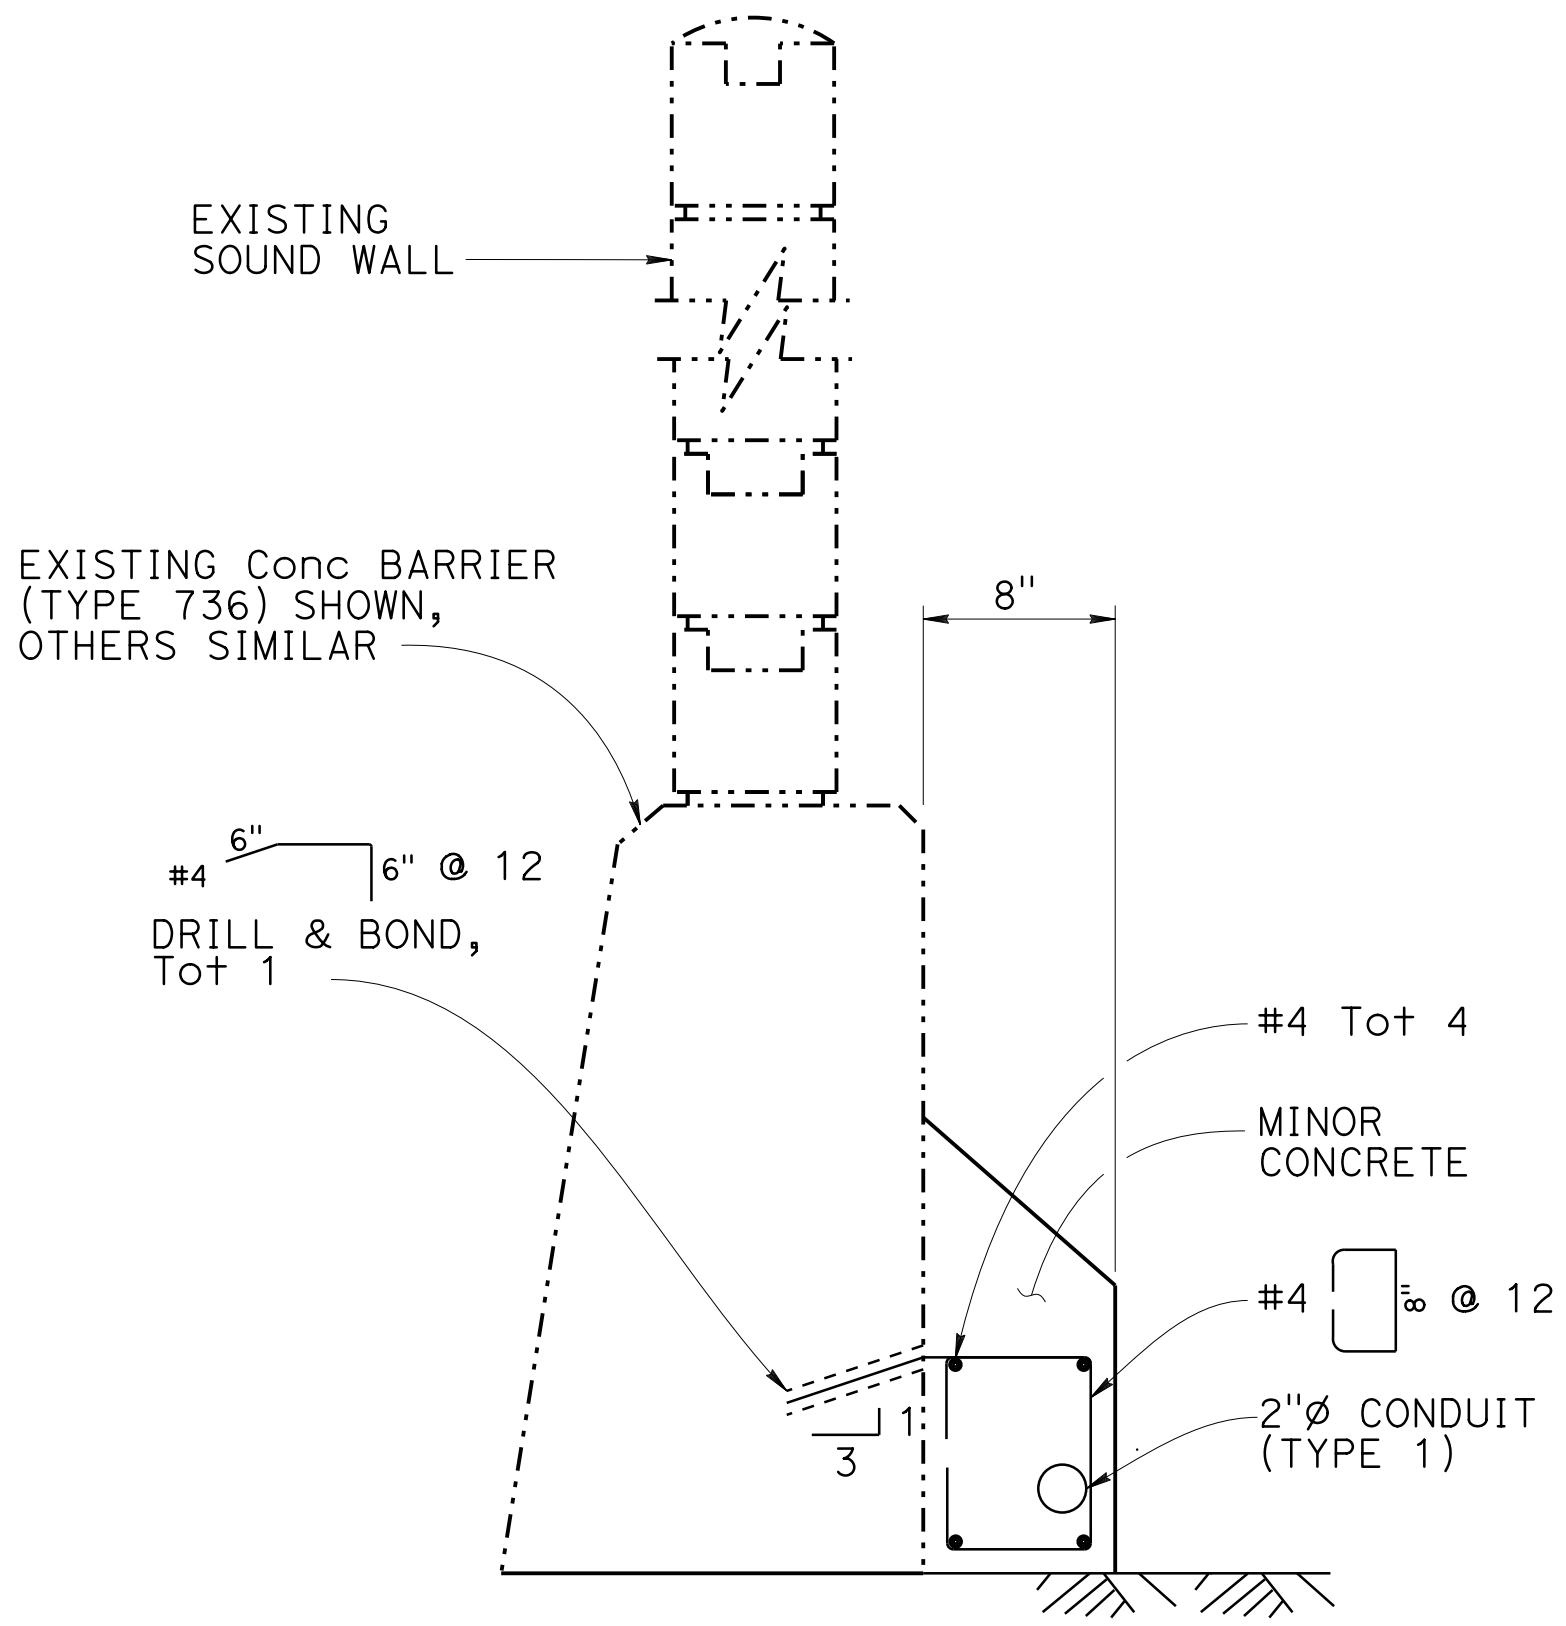

ATTACHMENT TO SOUND WALL ON BARRIER

NO SCALE

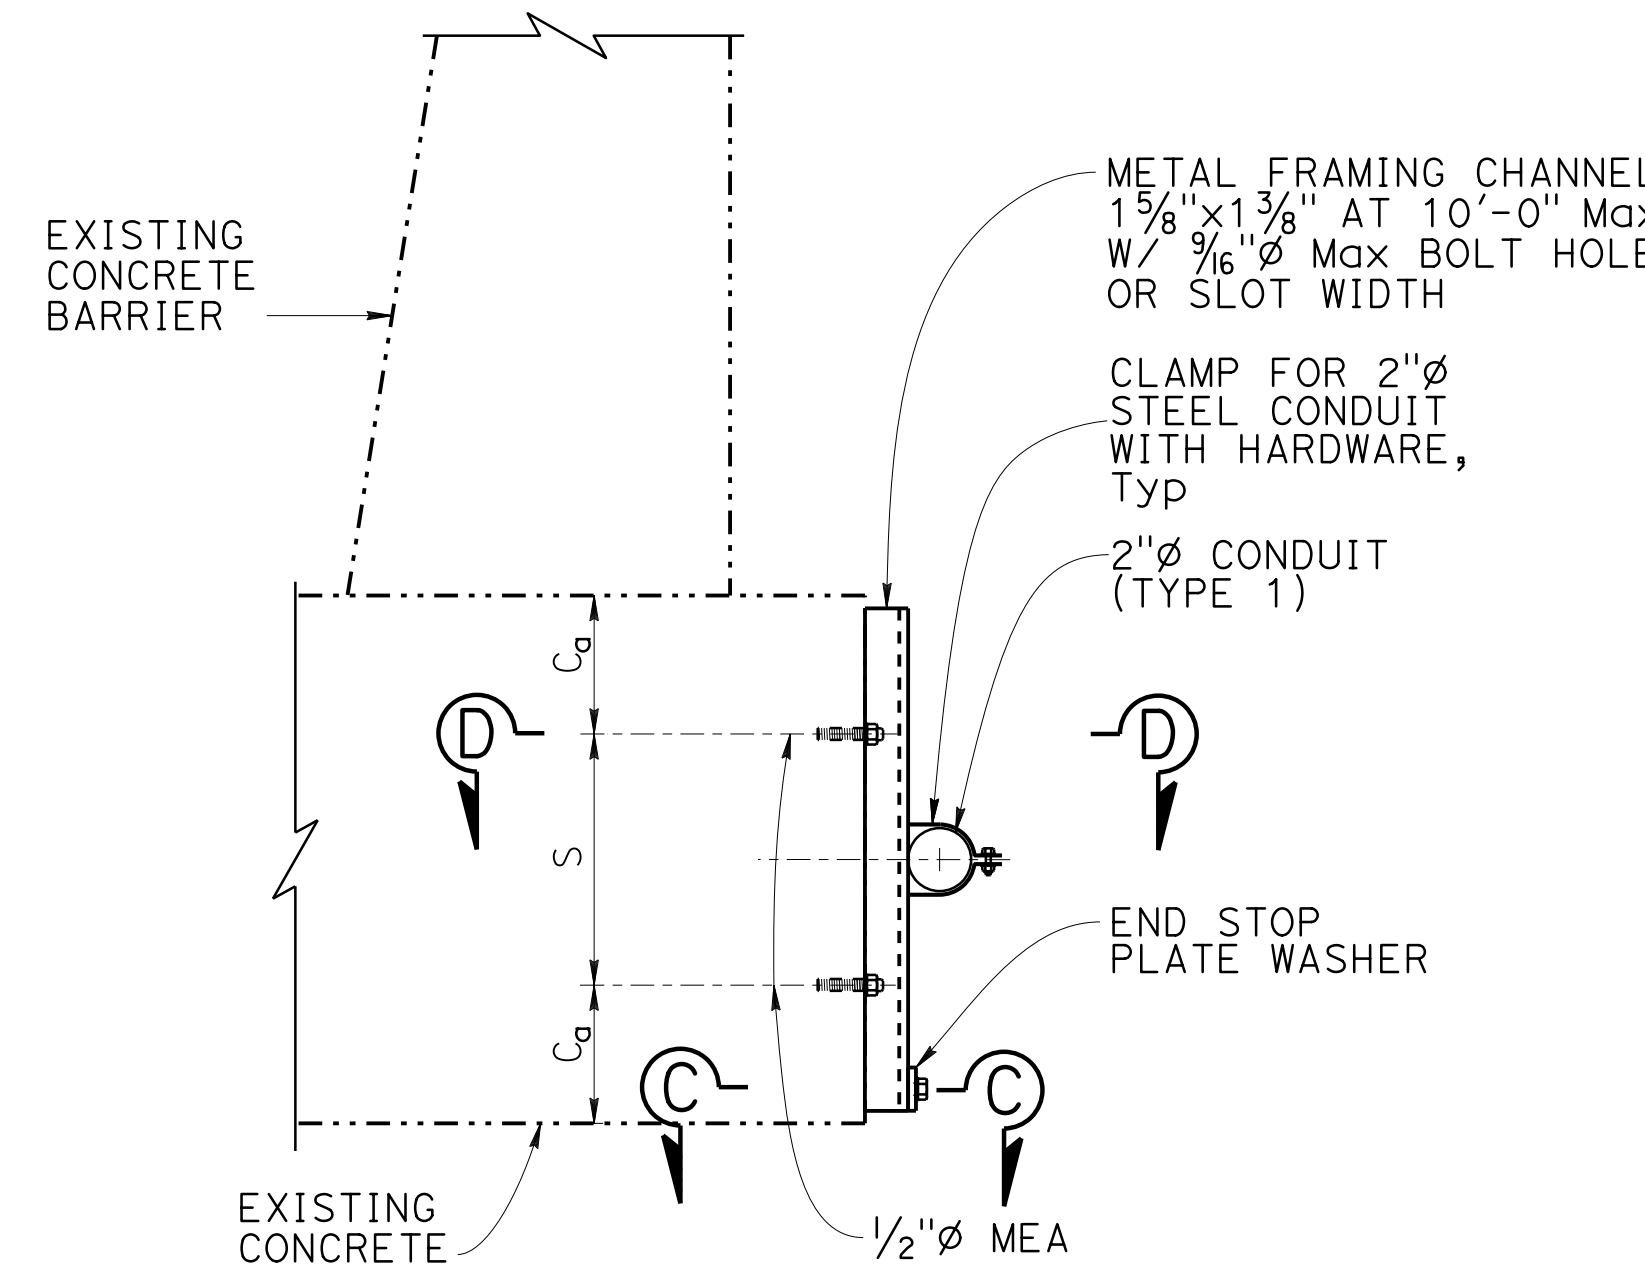

ATTACHMENT TO SLAB OR CULVERT DETAIL

NO SCALE

NOTES:

1. All attachments to any structure must remain within State Right-of-Way. To avoid encroachment outside of State Right-of-Way, refer to ROADWAY PLANS.
2. When existing utilities are located inside a barrier, drill and bond dowels are not allowed.
3. If scuppers are encountered, move bottom drill and bond dowel (beyond the limits of scupper) at least 4 inches.
4. Use aggregate with maximum diameter of ⅜" to minimize rock pockets in minor concrete.
5. Install expansion fittings at each structure expansion joint.
6. All mounting hardware shall be protected against corrosion.

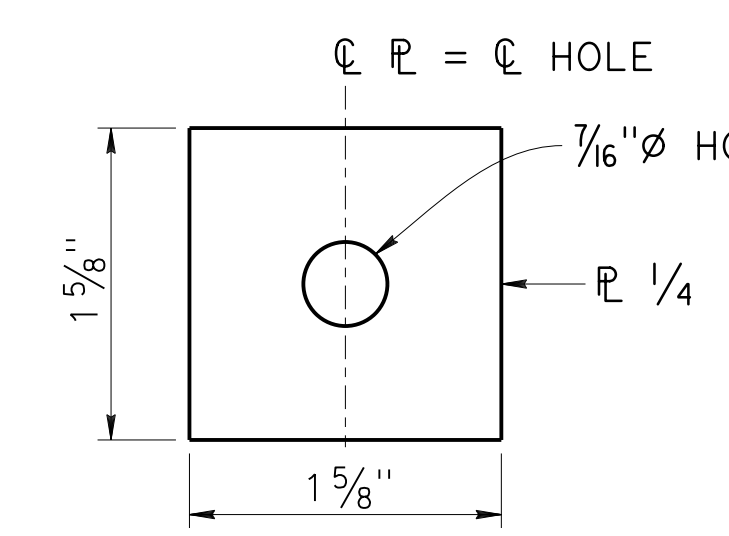

PLATE WASHER

NO SCALE

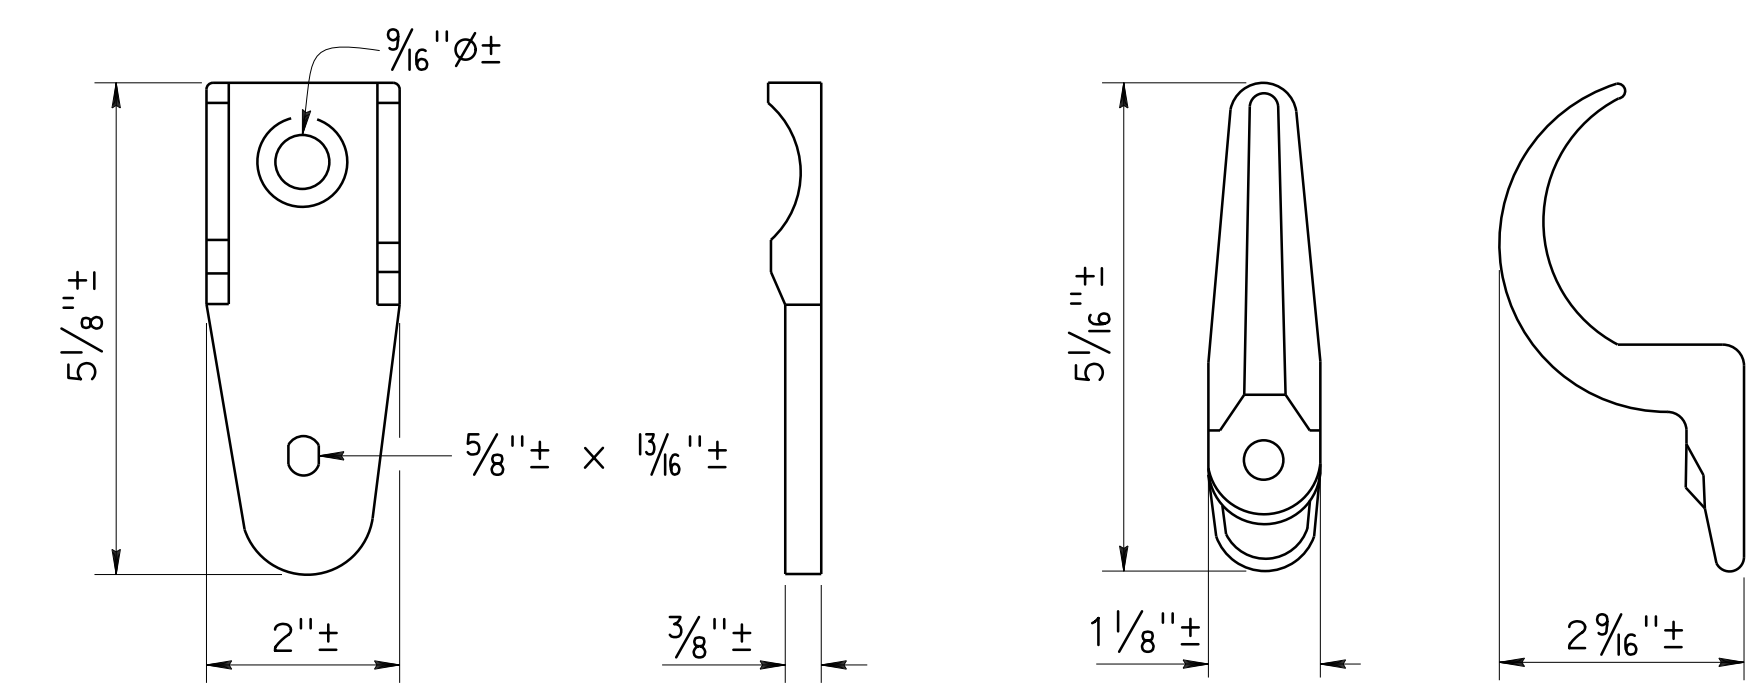

CONDUIT CLAMP DETAIL

NO SCALE

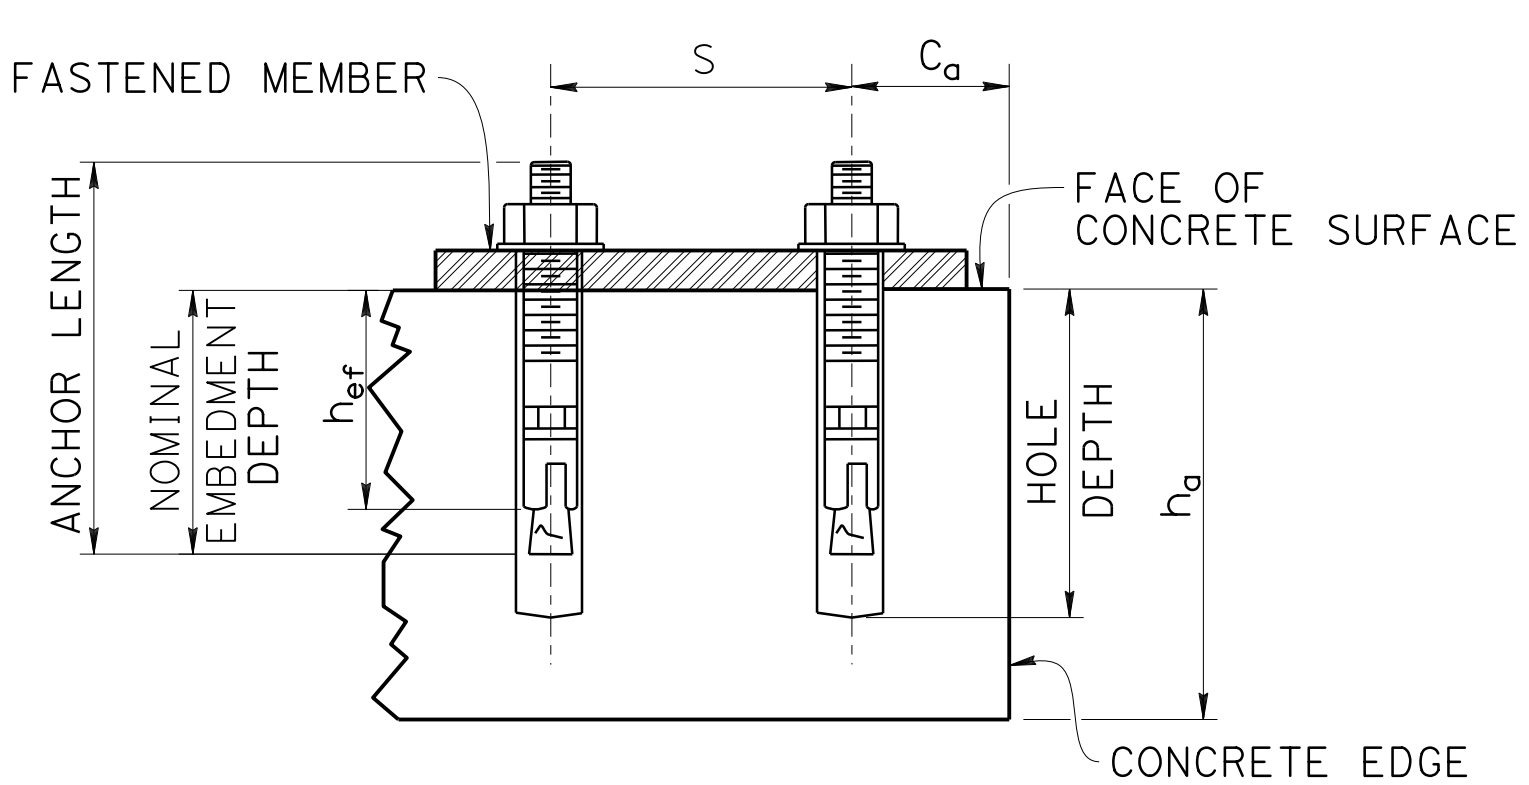

TYPICAL STUD TYPE (WEDGE)

STUD MEA

NO SCALE

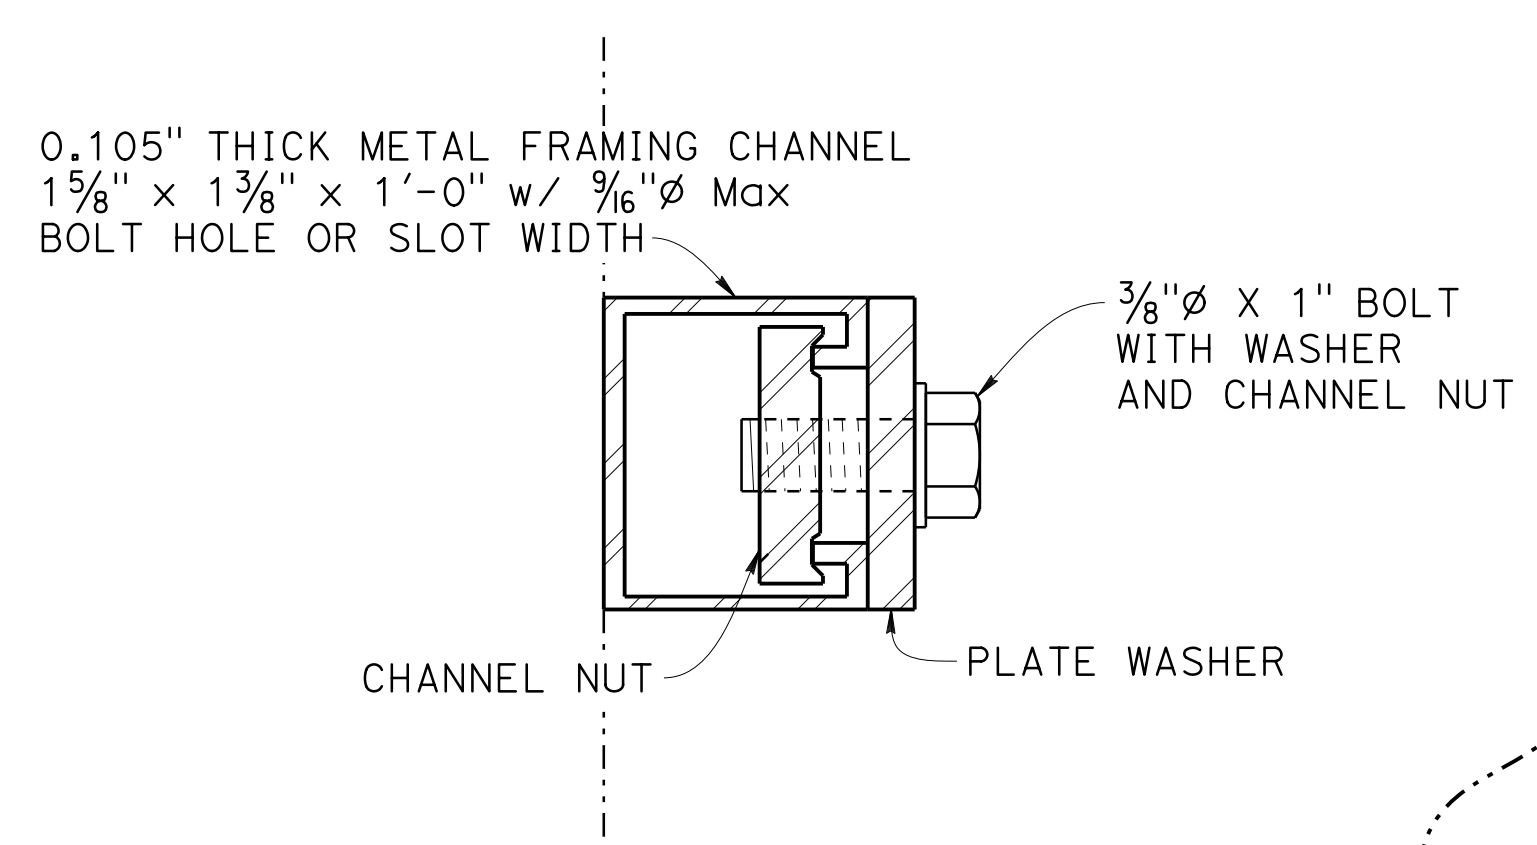

SECTION C-C

NO SCALE

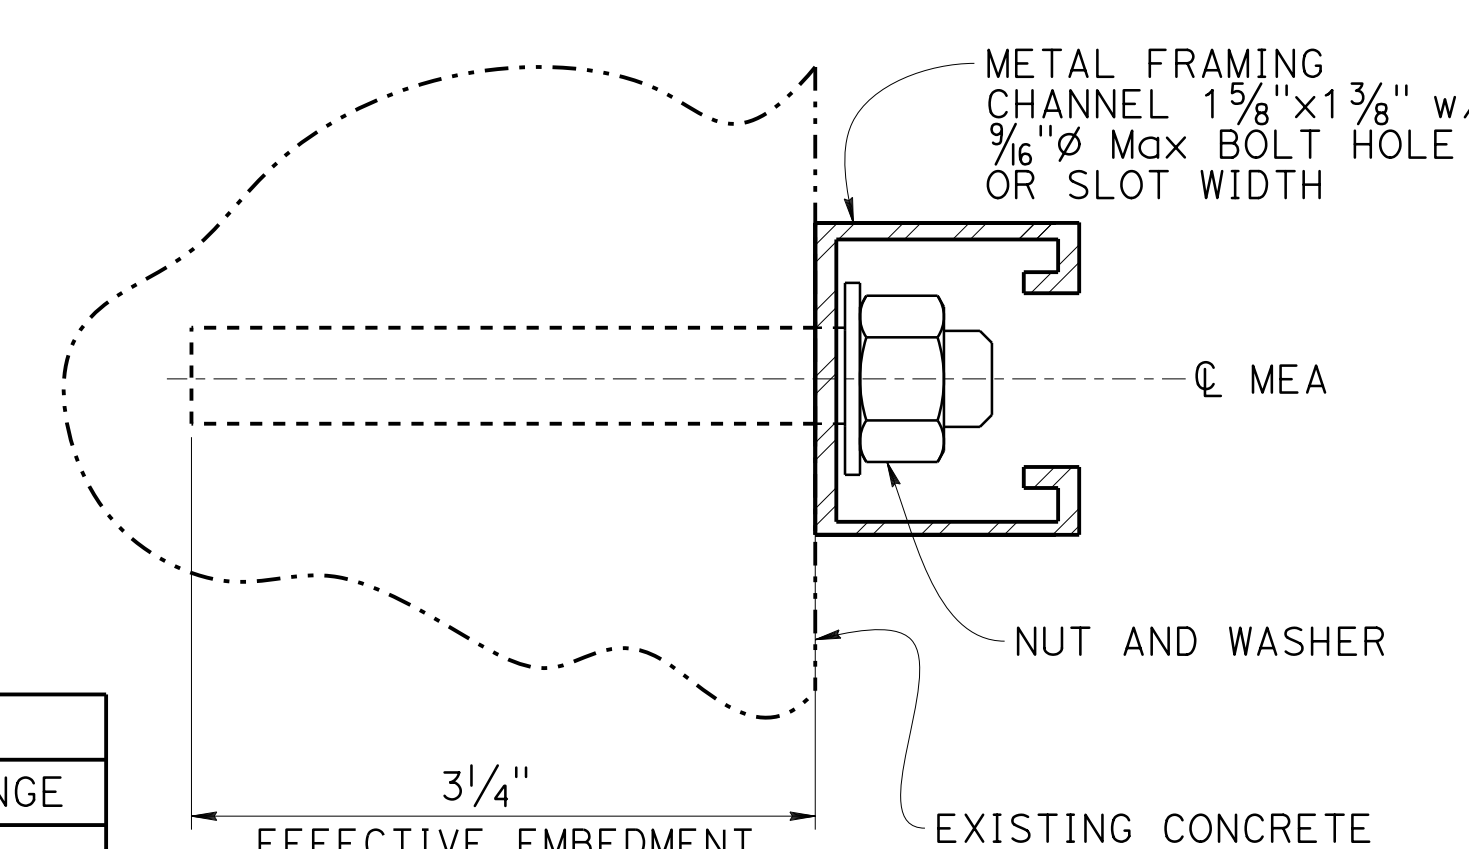

SECTION D-D

NO SCALE

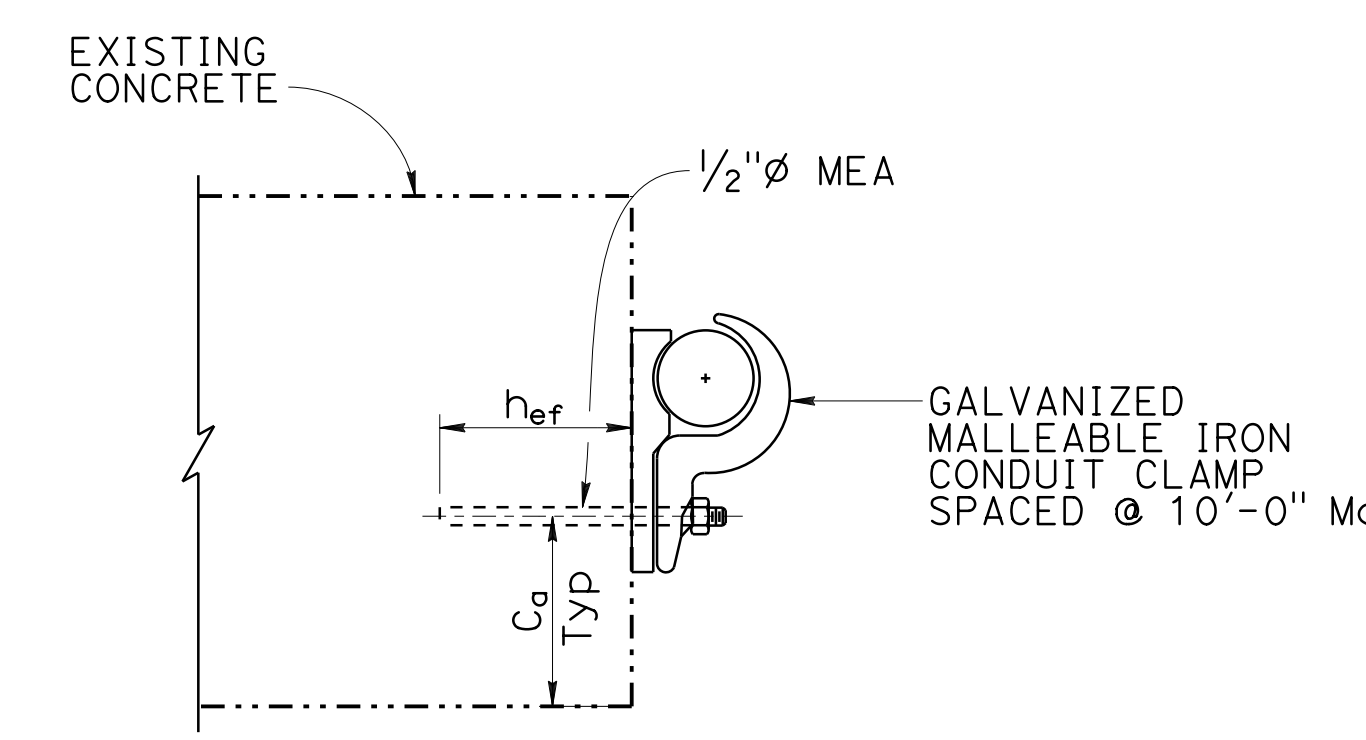

ATTACHMENT TO SLAB OR CULVERT DETAIL

NO SCALE

CONCRETE ANCHORAGE REQUIREMENTS

Anchor Diameter (in)	Minimum Effective Embedment h_{ef} (in)	Minimum Concrete Thickness h_a (in)	Minimum Edge Distance C_a (in)	Minimum Anchor Spacing S (in)
½*	2	6	4	6
	3¼	6	4	4

* = Alternative embedment depths for ½" anchor.

EXPANSION FITTING INSTALLATION POSITION TABLE

INSTALLATION PERIOD	% OF MAXIMUM EXPANSION RANGE
December to February	80%
March to May and September to November	50%
June to August	20%

BRIDGE STANDARD DETAILS

xs20-015-4	AUGUST 2023	*The components of the Bridge Standard Details have been prepared under the responsible charge of the Technical Owner, a registered civil engineer in the State of California*
FILE NO.	APPROVAL DATE	

STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION

DIVISION OF ENGINEERING SERVICES

BRIDGE No. XX-XXXX
POST MILE X.X

COMMUNICATION CONDUIT (Exist CONCRETE)

Refer to: http://www.dot.ca.gov/hq/esc/techpubs/manual/bridgemanuals/bridge-standard-detail-sheets/index.html

DATE PLOTTED => 7-SEP-2023 TIME PLOTTED => 11:31
FILE => 20230907_xs20-015-4.dgn USERNAME => s155182

ORIGINAL SCALE IN INCHES FOR REDUCED PLANS 0 1 2 3

UNIT: XXXX
PROJECT NUMBER & PHASE: XXXXXXXXXXX1

COUNTY/ROUTE: XXX/XXX
CONTRACT No.: XX-XXXXX4

DISREGARD PRINTS BEARING EARLIER REVISION DATES

REVISION DATES — SHEET X OF X