


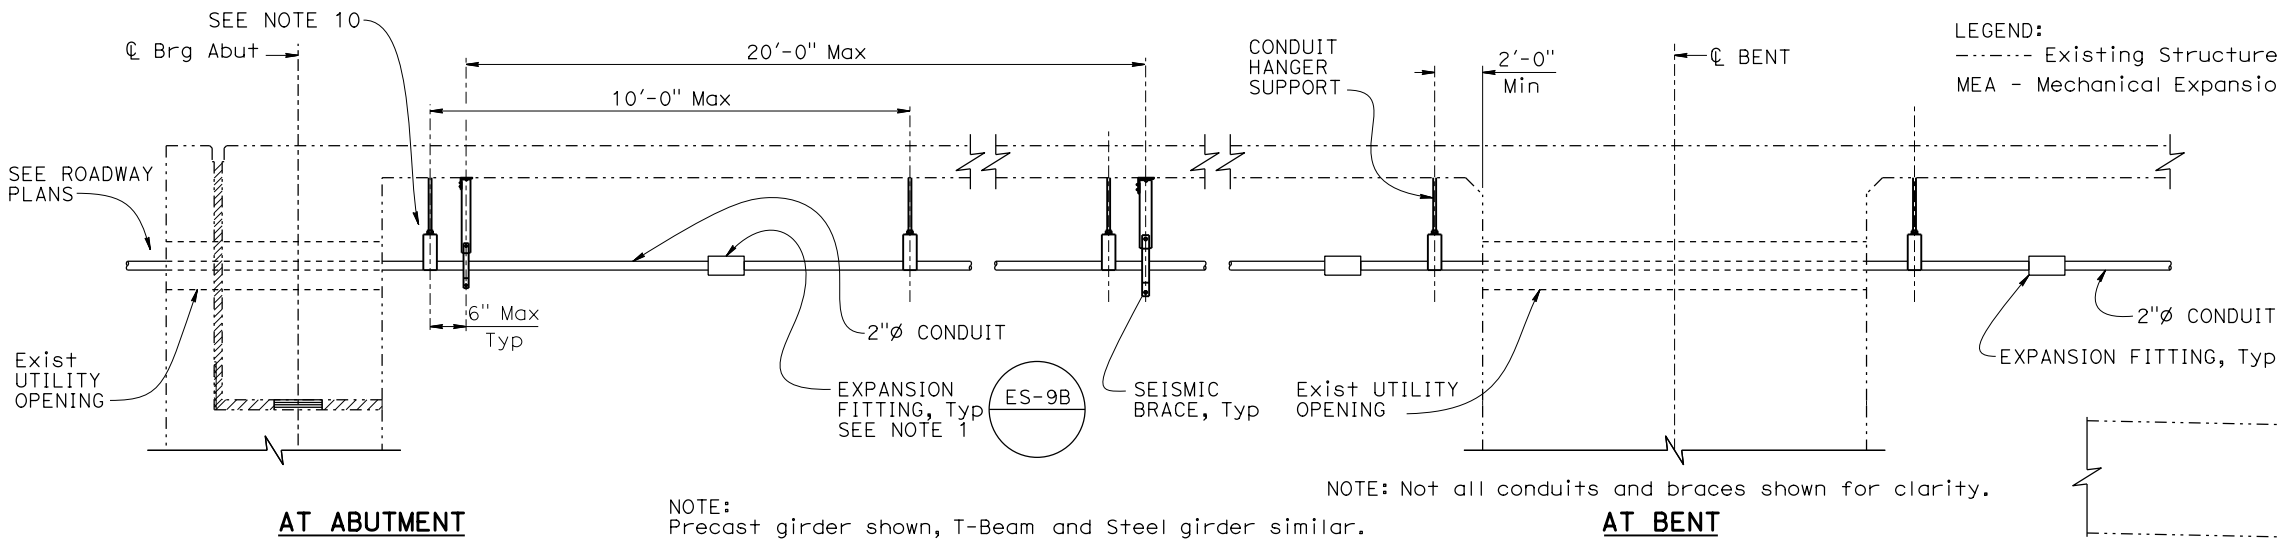

Dist COUNTY ROUTE POST MILES TOTAL PROJECT SHEET No. TOTAL SHEETS

REGISTERED CIVIL ENGINEER X DATE



PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.


THE REGISTERED CIVIL ENGINEER FOR THE PROJECT IS RESPONSIBLE FOR THE SELECTION AND PROPER APPLICATION OF THE COMPONENT DESIGN AND ANY MODIFICATIONS SHOWN.

REGISTERED PROFESSIONAL ENGINEER  
No. X  
Exp. X  
CIVIL  
STATE OF CALIFORNIA


- NOTES:
- Expansion fittings and expansion-deflection fittings shall be installed adjacent to BB, EB, joints or hinges (within 8 feet). Fittings must be able to handle up to the Movement Range (MR) noted for the bridge. For expansion fitting installation, see "EXPANSION FITTING INSTALLATION POSITION TABLE."
  - For vault locations and other details not shown, see ROADWAY PLANS.
  - For additional details, see "COMMUNICATION CONDUIT (ATTACHMENT DETAILS)" sheet.
  - Conduit hanger details depend on conduit configuration and layout shown in ROADWAY PLANS. Details shown can be used for all steel girder, precast girder or T-Beam structures.
  - Mechanical expansion anchors must be authorized by the Department.
  - Access openings may be added as required per the Engineer's approval.
  - Coring is not allowed in existing diaphragms or bent caps.
  - Minimum angle of seismic brace is 0°. Maximum angle is 60°.
  - At BB, EB, and hinges, replace the conduit hanger with a pipe roller steel yoke system.
  - All mounting hardware shall be protected against corrosion.

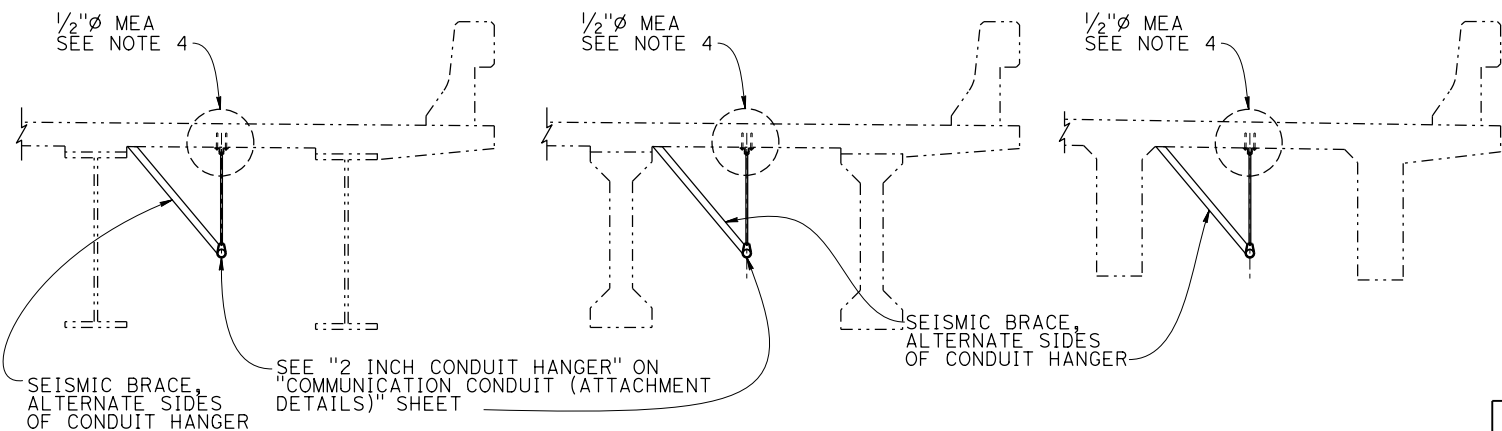


LONG LEG VERTICALLY  
DETAIL X  
NO SCALE

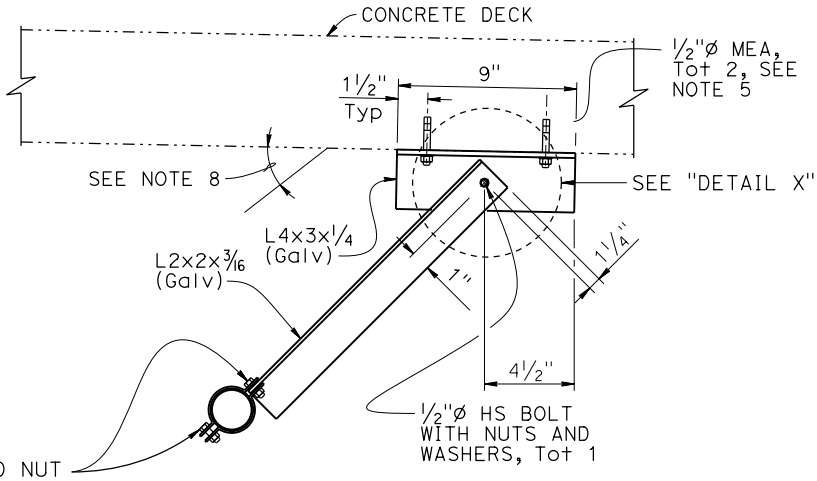

SEISMIC BRACE DETAIL 2-INCH CONDUIT  
NO SCALE

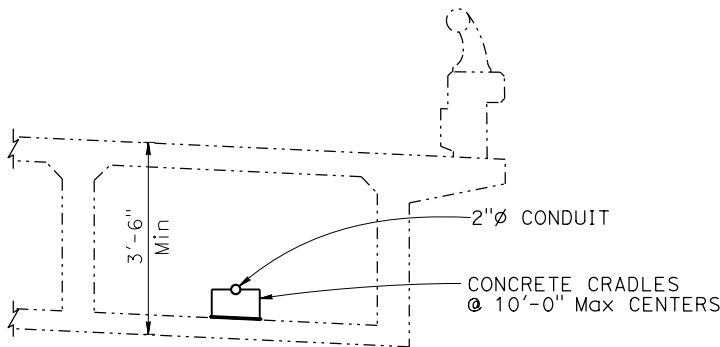

BOX GIRDER BRIDGE  
SEE NOTE 3

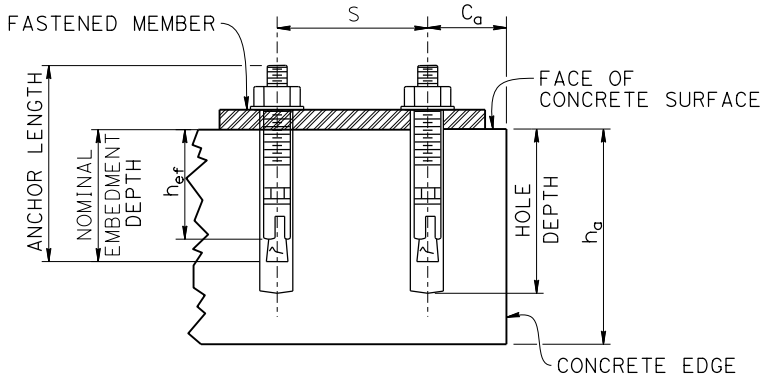

TYPICAL STUD TYPE (WEDGE)  
STUD MEA  
NO SCALE

| EXPANSION FITTING INSTALLATION POSITION TABLE |                              |
|-----------------------------------------------|------------------------------|
| INSTALLATION PERIOD                           | % OF MAXIMUM EXPANSION RANGE |
| December to February                          | 80%                          |
| March to May and September to November        | 50%                          |
| June to August                                | 20%                          |

| CONCRETE ANCHORAGE REQUIREMENTS |                                           |                                       |                                  |                                 |
|---------------------------------|-------------------------------------------|---------------------------------------|----------------------------------|---------------------------------|
| Anchor Diameter (in)            | Minimum Effective Embedment $h_{ef}$ (in) | Minimum Concrete Thickness $h_a$ (in) | Minimum Edge Distance $C_a$ (in) | Minimum Anchor Spacing $S$ (in) |
| 1/2*                            | 2                                         | 6                                     | 4                                | 6                               |
|                                 | 3/4                                       | 6                                     | 4                                | 4                               |

\* = Alternative embedment depths for 1/2" anchor.